



NOTE:
7341 BUSHING MUST BE REPLACED
IF 7B125 IS REMOVED

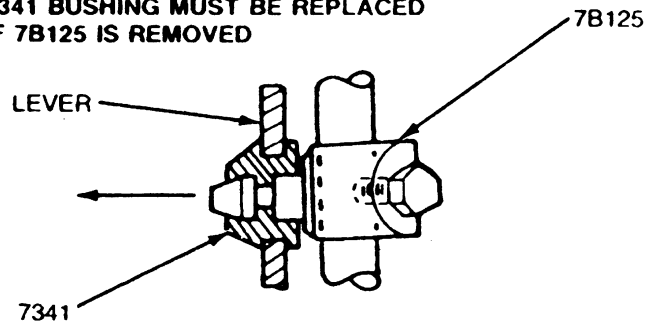

7341 BUSHING MUST BE INSTALLED IN
LEVER IN DIRECTION INDICATED BY ARROW

VIEW Z

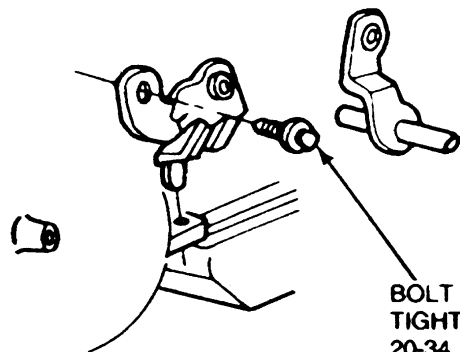

5.8L APPLICATION
VIEW X

BOLT
TIGHTEN TO
20-34 N·m
(15-25 LB-FT)

ADJUSTING NUT

TIGHTEN TO
19-31 N·m
(14-23 LB-FT)


VIEW Z

BRACKET
ASSY

7B125

ROD

5.0L APPLICATION
REFER TO VIEW
X FOR 5.8L
APPLICATION

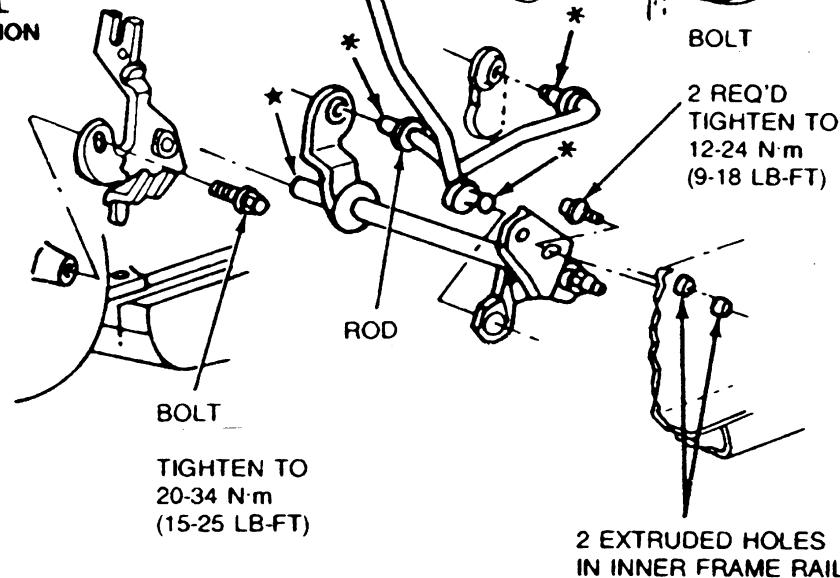

BOLT

TIGHTEN TO
20-34 N·m
(15-25 LB-FT)

2 EXTRUDED HOLES
IN INNER FRAME RAIL

* LUBRICATE WITH ESE-M2C96-E ENGINE OIL

★ LUBRICATE ID OF BEARING LIBERALLY WITH ESA-MIC75-B