



1

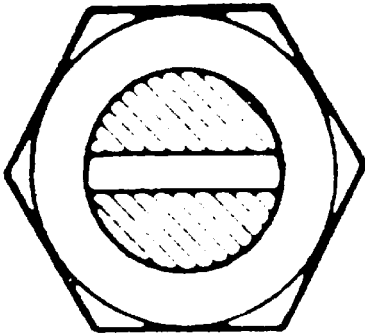


WITH HUB ROTATING,
TIGHTEN ADJUSTMENT NUT,
TO 23-34 N·m (17-25 LB-FT)

2

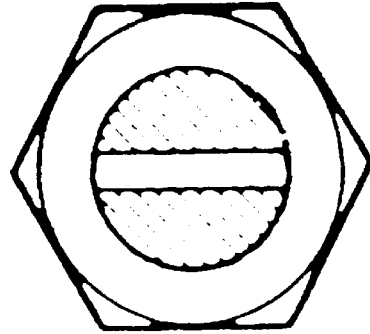


BACK ADJUSTING
NUT OFF 1/2 TURN

3

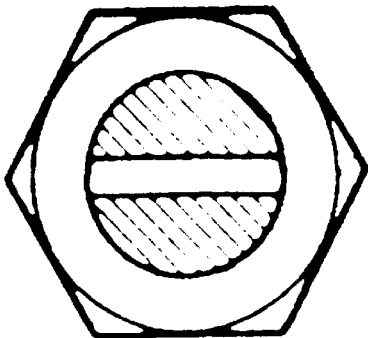

TIGHTEN ADJUSTING
NUT TO 1.1-3.2 N·m
(10-28 LB-IN)

4

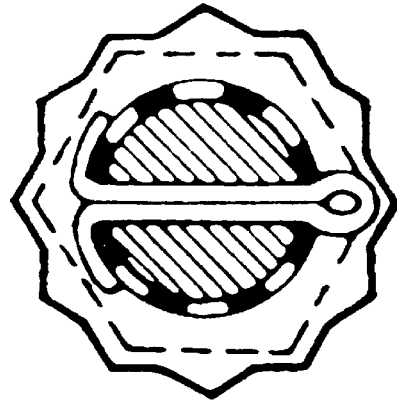

INSTALL RETAINER
AND A NEW COTTER PIN