


FRONT AXLE 2WD

DESCRIPTION

Tapered roller bearings are used for the front wheel bearings.

The preload of the bearing can be determined only by tightening the axle hub nut to a specified torque.

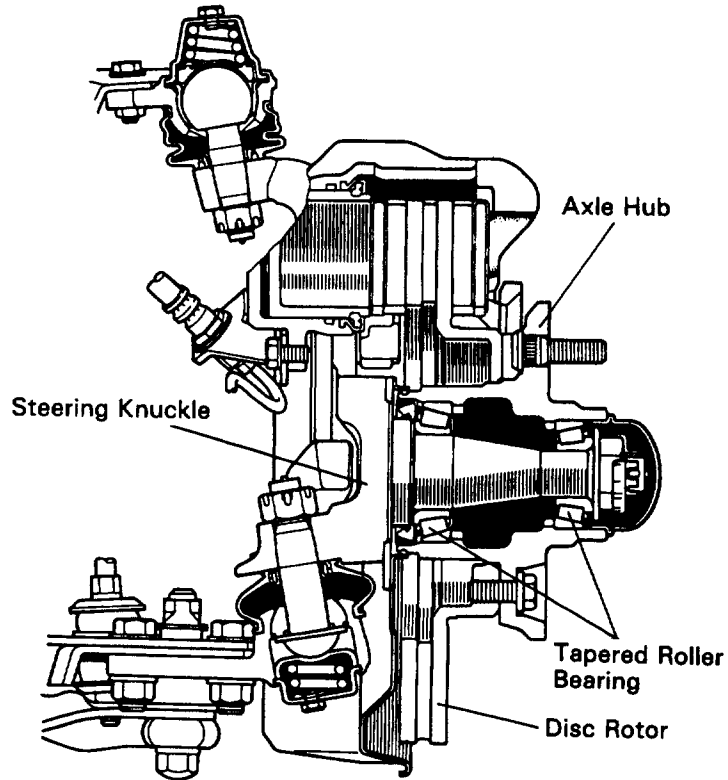

R07919