


## SYSTEM CIRCUIT

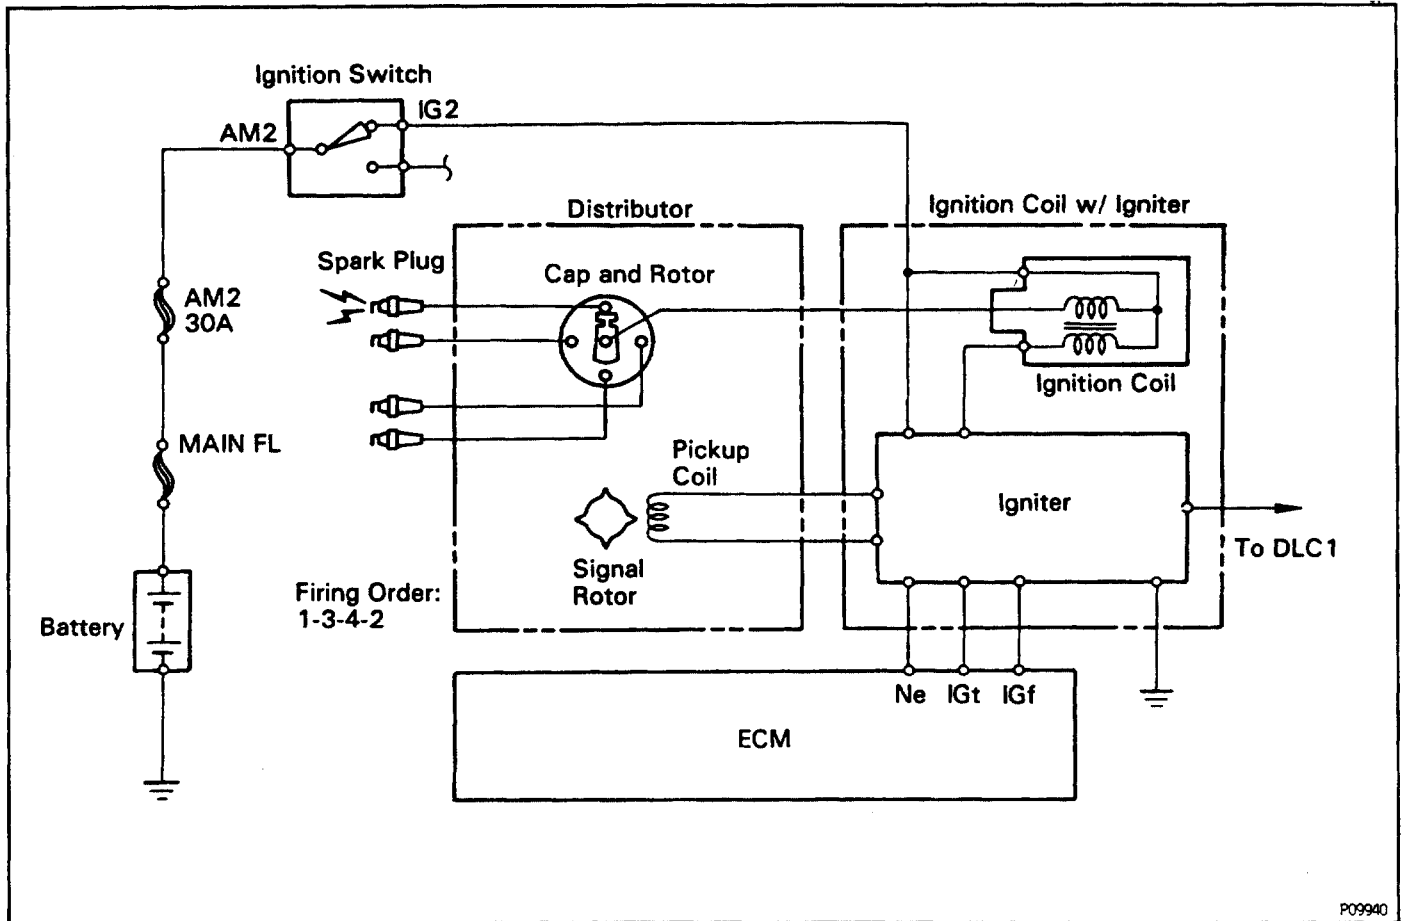

## ELECTRONIC SPARK ADVANCE (ESA)

The ECM is programmed with data for optimum ignition timing under all operating conditions. Using data provided by sensors which monitor various engine functions (rpm, intake air volume, engine coolant temperature, etc.) the microcomputer (ECM) triggers the spark at precisely the right instant.